




■ 外形寸法図 External Layout Drawing

(Unit : mm)

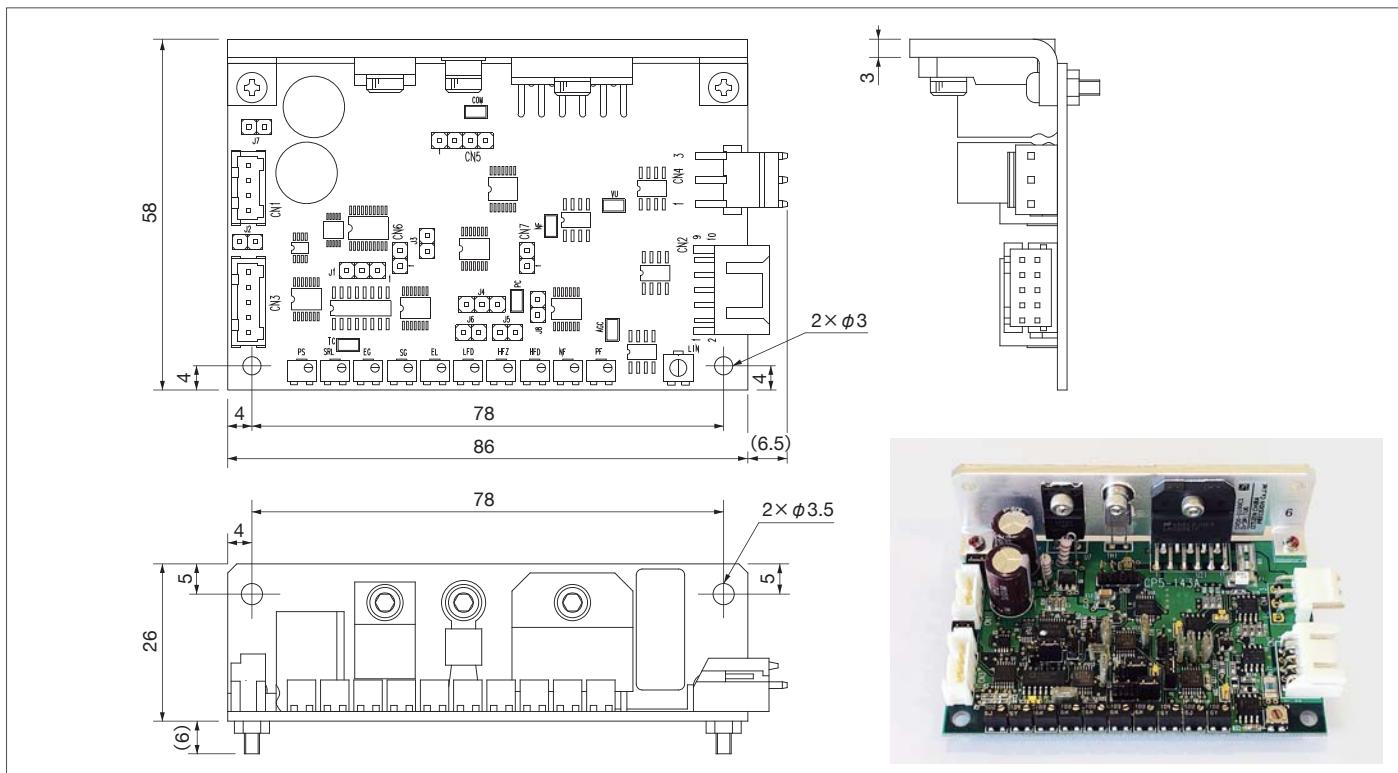

■ ドライバ仕様

型 式		GVD0 - ***** - **
電 源	電 源 電 壓	±15V 又は ±24V
	最 大 動 作 電 流	2.5A RMS
	瞬 間 最 大 電 流	10A
指令信号入力	電圧範囲(差動)	±3V／±5V／±10V
	入力インピーダンス	20kΩ (差動入力時)
モニター出力	位 置 出 力	±1.5V／±2.5V／±5V
機 能	入 力 信 号	サーボON
	出 力 信 号	レディー
	保 護 機 能	ドライバ過熱 オーバーポジション 過電流 センサ異常
	使 用 温 度 範 囲	0～+50°C
	寸 法	93 x 57.5 x 31 mm
重 量	約 60g (ヒートシンク込み)	

P 制御と PI 制御の違いについて

ガルバノスキャナサーボドライバ GVD シリーズには P 制御と PI 制御があります。使用される用途に応じて下記を参考に選択してください。

・ P 制御

指令信号と位置フィードバック信号を比較しエラーに比例した信号を出力します。時間積分しないためサーボクローズドループ帯域が高くなります。従ってスキャナは高速に応答し、速やかに定位します。歪みやフリクションが生じた場合、指令に対して位置誤差が発生します。

・ PI 制御

指令信号と位置フィードバック信号を比較しエラーを時間積分し出力します。このため歪みやフリクションに関係なく定常状態(非常に小さい位置誤差の状態)を保つことができます。この積分によって非常に高い位置再現性が得られます。

定位時間の高速性を重視する場合は P 制御を、位置再現性を重視する場合は PI 制御を選択してください。

■ Driver Specifications

Model		GVD0 - ***** - **
Power	Power Voltage	±15V or ±24V
	Max. Operating Current	2.5A RMS
	Maximum Output	10A
Command Signal Input	Voltage(Differential)	±3V／±5V／±10V
	Input Impedance	20kΩ (At differential input)
Monitor Output	Position Output	±1.5V／±2.5V／±5V
Function	Input Signal	Servo ON
	Output Signal	Ready
	Over heating	
	Over positioning	
	Over current	
Protection		Sensor error
Ambient Temperature Range		0°C to +50°C
Dimension		93 x 57.5 x 31 mm
Weight		60g (with heat sink)

Our galvanometer optical scanner (GVD) series have either P or PI control systems.

Please read the following information before placing an order.

P Control

This control compares position feed back signal and command signal to output either signal which is proportional to the differential. The closed-loop band will be high because it will not integrate the time and therefore the scanner responds quickly and sets position promptly. In case of distortion or friction, position error may occur against command.

PI Control

This control compares position feed back signal and command signal to output the differential which is time-integrated. It will keep in the steady-state (or the state with extremely small position error) regardless of distortion or friction. Remarkably high position repeatability can be obtained by the time-integration.

Please select P Control if considering for the speed of stabilization time, or PI Control if considering for the position repeatability.